

CuO/ Water Nanofluid Heat Transfer Through Triangular Ducts

S. Zeinali Heris, E. Talaii, S. H. Noie*

Chemical Engineering Department, Engineering Faculty, Ferdowsi University of Mashhad, Mashhad, Iran

Abstract

In the present paper laminar flow forced convective heat transfer of CuO/water nanofluid in a triangular duct under constant wall temperature condition is investigated numerically. Sometimes, because of pressure drop limitations the need for noncircular ducts arises in many heat transfer applications. We used nanofluid instead of pure fluid because of its potential to increase heat transfer of system. In this paper, the effect of parameters such as nanoparticles diameter, nanoparticles concentration, type of nanoparticles and heat transfer comparison between nanofluid and pure fluid is studied. Comparison of convective heat transfer of nanofluid in isosceles triangular ducts with various apex angles is also presented. In this study, for the presence of nanoparticles, the dispersion model and for solving differential equations, the finite difference method is used. Numerical results indicate an enhancement of heat transfer of fluid with changing to the suspension of nanometer-sized particles in the triangular duct. Results also defined that equilateral triangular duct has a maximum heat transfer in comparison with other types of isosceles triangular duct.

Keywords: *Heat transfer Enhancement, Triangular Duct, CuO/water Nanofluid*

1. Introduction

Increased effort is being directed at producing more efficient heat exchangers to effect savings of energy, material and labor. Because of size and volume constraints in applications to aerospace, nuclear, biomedical engineering and electronics, it may be necessary to use non-circular flow-passage geometries, particularly in compact heat exchangers [1]. The optimization of heat exchangers therefore always has to be aimed at an increase in the heat transfer simultaneously with a minimum increase of

pressure drop[2].Consequently, ducts with non-circular cross-section are used in this study due to less pressure drop, although it causes decreasing heat transfer. As the heat transfer rate through the noncircular ducts (triangle, square, rectangle,...etc.) is smaller than that of circular tubes due to less pressure drop, adding nanoparticles to heat transfer fluids may enhance the heat transfer properties of noncircular ducts[3].

An innovative way of improving the heat transfer performance of common fluids is to suspend various types of small solid

* Corresponding author: zeinali@ferdowsi.um.ac.ir

particles, such as metallic, nonmetallic and polymeric particles in conventional fluids to form colloidal. However, suspended particles of the order of μm or even mm may cause some severe problems in the flow channels, increasing pressure drop, causing the particles to quickly settle out of suspension [4]. Nanofluids possess better stability, much higher surface area, less clogging and abrasion[5]. So nanofluid was used instead of pure fluid because of its potential to increase the heat transfer of the system. Nanofluids are created by dispersing nanometer-sized particles ($< 100 \text{ nm}$) in a base fluid such as water, ethylene glycol or propylene glycol [6]. In heat transfer applications, the suspension should have a sufficiently high volume fraction of suspended solid, while avoiding significant increases in viscosity relative to the parent liquid. In addition, the suspension should remain stable and avoid sedimentation or degradation during use. The most important requirement is that suspension must be chemically stable, thereby avoiding flocculation, coagulation, or gel formation. Chemical stability can be achieved by use of suitable additives that modify the surface chemistry of the particle-liquid system, or provide a repulsive surface charge, such as that achieved via control of pH [7]. Understanding the physical and thermal properties of nanofluid is essential before using nanofluids in practical applications [7].

Choi [8] was the first person to create fluids containing a suspension of nanometer-sized particles called nanofluids, and indicate their considerable thermal properties by measuring the convective heat transfer coefficient of these fluids. Lee and Choi [9] studied

convective heat transfer of laminar flows of an unspecified nanofluid in microchannels, and observed a reduction in thermal resistance by a factor of 2. Nanofluids were also observed to be able to dissipate a heat power three times more than pure water could do. Xuan and Rotzel [10] considered two models (homogeneous and dispersion model) for investigating forced convective heat transfer.

Nanofluids boiling process has been investigated experimentally by several researchers. Bang and Chang [11] studied boiling heat transfer characteristics of nanofluids with alumina nanoparticles suspended in water. They found that the addition of alumina nanoparticles caused a decrease of pool nucleate boiling heat transfer. There are different and opposite parameters affecting the boiling heat transfer performance of nanofluids including the viscosity of the solution, nanoparticle collision with the heater surface and bubbles, and the boundary layer thickness. Soltani et al investigated Pool boiling heat transfer of non-Newtonian nanofluids. The combination of the variations in such parameters causes better performance for non-Newtonian nanofluids in comparison with the non-Newtonian base fluid[12].

There are many passive cases about nanofluids that are still unrecognized. Most of the searches are about heat transfer in circular ducts and there is no report about ducts with a triangular cross-section which causes a lower pressure drop than other forms of ducts.

Kays and London [13] showed that a compact heat-exchanger, with a triangular cross-sectional internal flow passage, has a

high ratio of heat-transfer area to flow-passage volume. Shah and London [14] studied the heat transfer characteristics of laminar flow in a wide variety of channel shapes, including for equilateral triangular with rounded corners, isosceles triangular, right triangular and arbitrary triangular cross-section ducts, for an extensive range of thermal boundary conditions. As can be seen, investigations are about pure fluids, so studying the laminar flow forced convective heat transfer of nanofluid in a triangular duct with constant wall temperature using the dispersion model is the aim of this paper.

2. Mathematical modeling

Laminar flow forced convection of CuO/water nanofluid in a triangular duct is studied numerically. The duct configurations and coordinate system are shown in Fig.1.

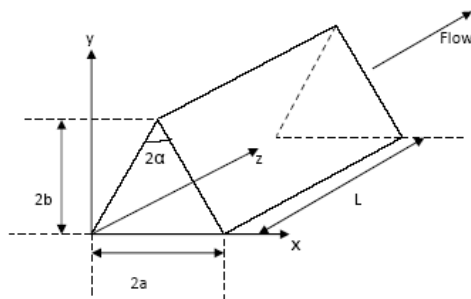


Figure 1. Geometry of a triangular duct.

For the hydrodynamically developed and thermally developing flow, there is only one nonzero component of velocity (*u*), and the dimensionless velocity for triangular ducts using dimensionless parameters including

$$U = \frac{u}{u_m} \text{ (} u_m \text{ is average velocity) , } Y = \frac{y}{2b}$$

and $X = \frac{x}{2a}$ is defined as follows [14]:

$$U = \frac{15}{b^2} \left[-b^2 Y^3 + 3a^2 YX + (b^2 Y^2 + a^2 X^2) - \frac{4}{27} b^2 \right] \tag{1}$$

The energy equation for constant property flow is defined as:

$$\frac{k_{eff}}{\rho \cdot c_p} \left(\frac{\partial}{\partial x} \left(\frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left(\frac{\partial T}{\partial y} \right) \right) = u \frac{\partial T}{\partial z} \tag{2}$$

k_{eff} in the above equation is effective thermal conductivity of nanofluid and may take the following form[15]:

$$k_{eff} = k_{nf} + k_d \tag{3}$$

k_d is the dispersion thermal conductivity and the following formula has been proposed to calculate k_d [15-16]:

$$k_d = C(\rho \cdot C_p)_{nf} \cdot u_m \cdot v \cdot d_p \cdot a \tag{4}$$

In which (*C*) is an unknown constant and should be determined by matching experimental data.

At the end, the energy equation for laminar flow in an equilateral triangular duct is:

$$2aU \frac{\partial \theta}{\partial Z} = \left[\frac{k_{nf}}{(\rho \cdot c_p)_{nf} u_m} + \frac{C \cdot (\rho \cdot c_p)_{nf} \cdot v \cdot d_p \cdot a}{(\rho \cdot c_p)_{nf}} \right] \frac{\partial^2 \theta}{\partial X^2} + \left(\frac{a}{b} \right)^2 \left[\frac{k_{nf}}{(\rho \cdot c_p)_{nf} u_m} + \frac{C \cdot (\rho \cdot c_p)_{nf} \cdot v \cdot d_p \cdot a}{(\rho \cdot c_p)_{nf}} \right] \frac{\partial^2 \theta}{\partial Y^2} \tag{5}$$

In Eq. (5), Peclet number can be used to simplify the equation

$$pe_{nf} = \frac{2a \cdot u_m \cdot (\rho \cdot c_p)_{nf}}{k_{nf}} \tag{6}$$

Consequently the temperature distribution equation is in the form of:

$$2aU \frac{\partial \theta}{\partial Z} = \left[\frac{2a}{pe_{nf}} + C.u.d_p.a \right] \frac{\partial^2 \theta}{\partial X^2} + \left(\frac{a}{b} \right)^2 \left[\frac{2a}{pe_{nf}} + C.u.d_p.a \right] \frac{\partial^2 \theta}{\partial Y^2} \quad (7)$$

3. Thermo physical properties of nanofluids

It is expected that the heat transfer coefficient of the nanofluid will depend on the thermal conductivity and the heat capacity of the base fluid and nanomaterials, flow pattern, Reynolds and Prandtl numbers, temperature, the volume fraction of the suspended particles, the dimensions and shape of the particles [17]. So, some of the thermophysical properties used in this paper are defined as:

Density of nanofluid [10, 15, 18]:

$$\rho_{nf} = v \cdot \rho_p + (1-v) \rho_{bf} \quad (8)$$

Specific heat capacity of nanofluid [10,15,18]:

$$C_{p_{nf}} = \frac{v \rho_p C_{p_p} + (1-v) \rho_{bf} C_{p_{bf}}}{\rho_{nf}} \quad (9)$$

Thermal conductivity is an important parameter in the field of nanofluid heat transfer[19]. Various models for Conductive heat transfer coefficient of nanofluids are proposed. In absence of experimental data, Yu and Choi correlation [20] was used for determination of nanofluid effective thermal conductivity:

$$k_{nf} = \left[\frac{k_p + 2k_{bf} + 2(k_p - k_{bf})(1 + \beta)^3 v}{k_p + 2k_{bf} - (k_p - k_{bf})(1 + \beta)^3 v} \right] k_{bf} \quad (10)$$

In equation (10) β is the ratio of the nanolayer thickness to the original particle radius and $\beta = 0.1$ was used to calculate the nanofluid effective thermal conductivity.

All the thermophysical properties discussed above were incorporated in the present numerical analysis to compute the laminar heat transfer for three different types of nanofluids which are summarized in Table 1.

Table 1. Thermophysical properties of the nanoparticles used in the numerical computations at inlet temperature of 323 K

Nanoparticle	$\rho_p \left(\frac{kg}{m^3} \right)$	$C_p \left(\frac{J}{kgK} \right)$	$k_p \left(\frac{W}{mK} \right)$
AL ₂ O ₃	3700	880	46
Cuo	6350	535.6	69
Cu	8940	385	397.5

4. Validation of the simulation

In this paper, the finite difference method is used for numerical solution. Fig. 2 shows the grid distribution of the triangular duct that was used. The discretization in the physical space (x, y) is performed by dividing the flow domain in equal triangular elements. The grid is constructed by drawing inside the triangular cross section, three groups of parallel lines. The lines of each group are equally distanced and parallel to one of the three sides of the triangle.

The benefits of such a discretization is obvious since the boundaries of the computational domain are identical to the boundaries of the triangular cross section of

the channel, providing good accuracy in the numerical solution[21].

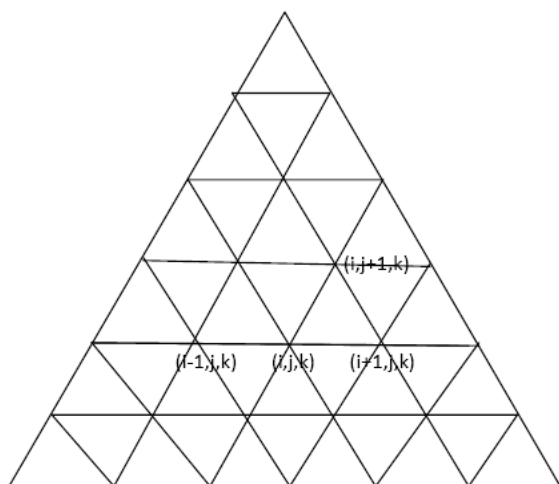


Figure 2. Physical lattice with its triangular elements

Of course, the involved computational effort is significant since solving for the unknown distribution function, in a general-geometry problem, would require a six-dimensional phase space grid (three variables in the physical space and three variables in the molecular velocity space), which imposes severe demands on computer resources (time and memory) [22].

The grid used in the present analysis is $56 \times 56 \times 100$ (56 in x, y direction, 100 in z direction). In order to ensure grid independence, the solution is tested for $80 \times 80 \times 180$, which gave similar values. Therefore, $56 \times 56 \times 100$ was accepted as the optimal grid size. In order to validate the computational model, the numerical results were compared with the theoretical data available for the conventional fluids in triangular duct by London [14]. Fig. 3 displays the comparison of Nusselt number computed by London and computed values from the present simulations.

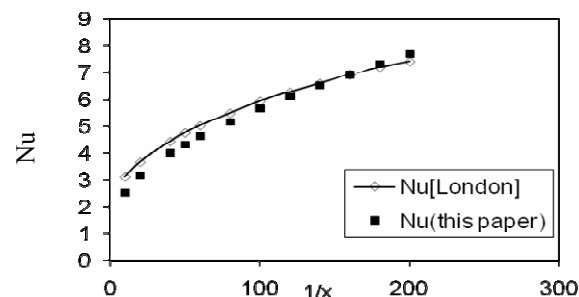


Figure 3. Comparison between model predictions and results defined by London [14]

5. Results and discussion

The numerical code developed is used to investigate the effect of parameters such as nanoparticles concentration (ν), nanoparticle diameter (d_p), and Reynolds number on the heat transfer of nanofluids. It is also used for Heat transfer comparison between isosceles triangular ducts with various apex angles. Considering the laminar flow regime, the range of Reynolds number is between 100-2300.

Fig. 4 shows the average Nusselt number versus Re for pure water and water/ CuO nanofluid. As shown in Fig. 4, the slope of Nu versus Re is greater for water/ CuO compared to pure water, which means a considerable enhancement of heat transfer by adding nanoparticles to the base fluid. The actual mechanism behind this enhancement remains unclear [23]. For example, at $Re=2065$, Nusselt number of water is increased from 3.79 to 5.38 by adding nanoparticles of CuO (.01 volume concentration, diameter of 10 nm).

Fig. 5 shows the average Nusselt number versus Reynolds at various concentration of CuO for 10nm-40nm nanoparticles. The effects of nanoparticle size and particle concentration on the thermal conductivity are shown in this figure. This figure indicates that

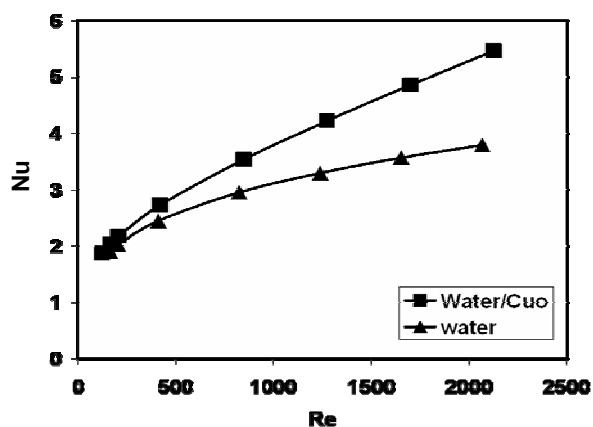


Figure 4. Comparison between nanofluid and pure fluid heat transfer

the average Nusselt number increases with nanoparticles concentration, and better enhancement is seen at lower particle diameters. This phenomenon can be related to nanoparticles interactions [24].

Essentially, adding more nanoparticles to the base fluid resulted in the further enhancement of the thermal properties of the base fluid. For example, at $dp=10$ and $Re=424$, by increasing nanoparticles concentration from 0.01 to 0.04, the average Nusselt number increases from 2.72 to 3.49 or at higher Reynolds number ($Re=2123$), the Nusselt number changes from 5.46 to 6.61. It can be seen that the Nusselt number enhancement by nanoparticles concentration is negligible at high nanoparticles diameters. But Fotukian and Nasr Esfahany [25] showed that in turbulent regime, increasing the nanoparticles concentration did not show much of an effect on heat transfer enhancement in the range of concentrations studied in that work.

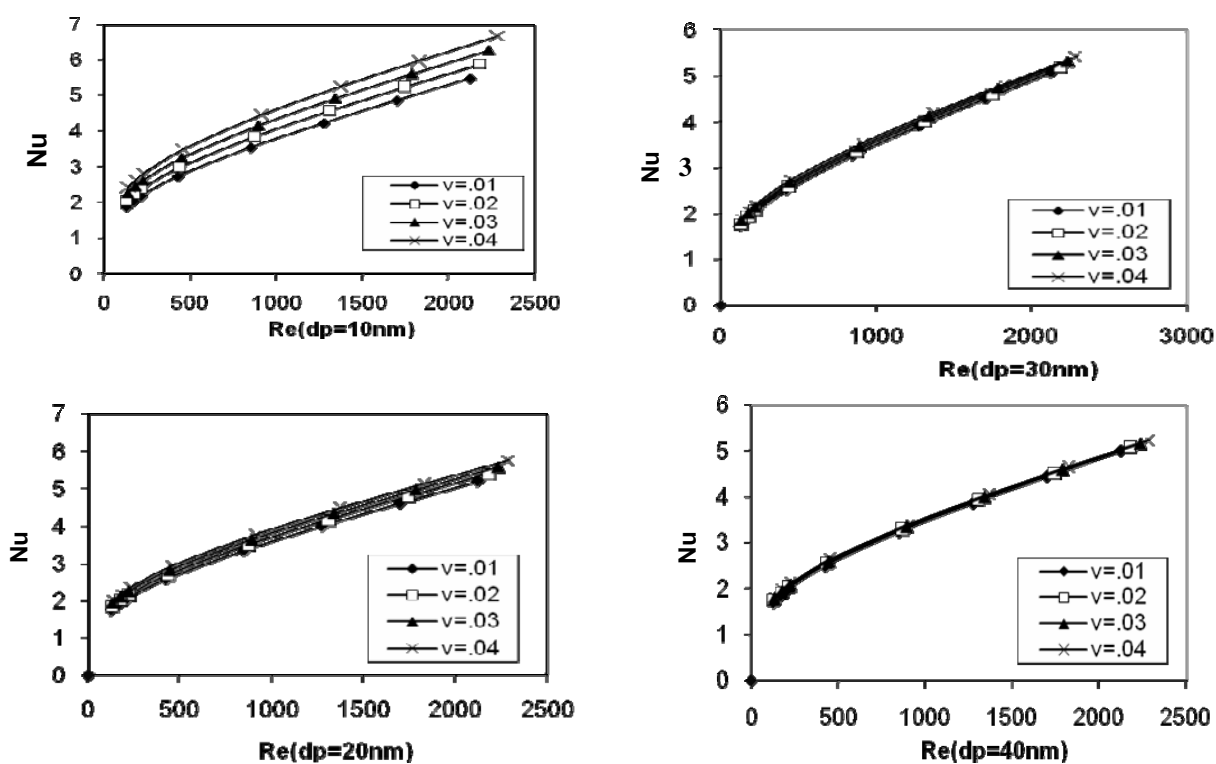


Figure 5. The influence of CuO nanoparticles volume concentration on the Nusselt number over a range of Reynolds numbers with 10 -40 nm diameter nanoparticles

As an example, by increasing nanoparticle size from 10 to 50nm in 0.02 concentration at $Re=1744$, the average Nusselt numbers decrease from 5.23 to 4.44. Also, at Reynolds number 2050 in 0.02 suspensions, increasing nanoparticle size from 10 to 50nm leads to a decrease in Nu from 5.68 to 4.82.

This figure indicates that the better enhancement is seen at higher Reynolds numbers. The results illustrate that by increasing nanoparticle concentration from 0.01 to 0.04 at $Re = 500$, the average Nusselt number increases from 2.88 to 3.6; while at $Re= 2000$, the Nusselt number changes from 5.3 to 6.23. But it was shown that in turbulent regime, the ratio of convective heat transfer coefficient of nanofluid to that of pure water decreased with Reynolds number [25].

In order to compare the heat transfer enhancement using different kind of solid nano-additive, Fig. 6 indicates the Nusselt number versus Reynolds of 3 nanofluids at various volume fraction for 10nm nanoparticles. As shown in Fig. 6, at $dp=10nm$ and $Re=2000$, by increasing nanoparticles concentration from 0.01 to 0.04, the average Nusselt number of water/Cu, water/CuO and water/ Al_2O_3 increases from 5.79 to 6.51, 5.29 to 6.23 and 4.83 to 5.95, respectively. So water/Cu nanofluid with 0.04 volume concentration of 10nm Cu nanoparticles has a maximum heat transfer in comparison with the 2 other types of nanofluid mentioned previously.

It has long been known that the layered molecules are in an intermediate physical state between a bulk liquid and a solid [26], the solid-like nanolayer of liquid molecules

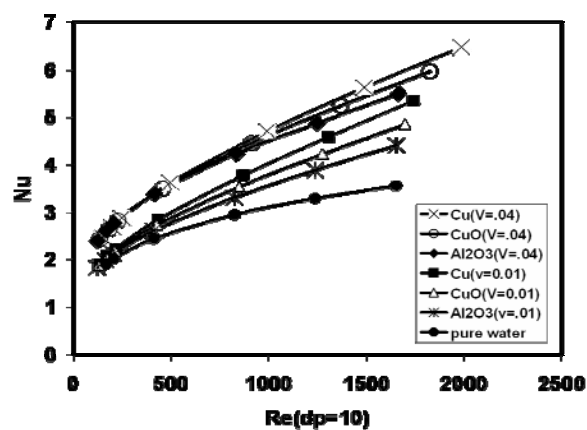


Figure 6. Comparison of Nusselt number versus Reynolds number for three different nanofluids at 0.02, 0.04 volume fraction of 10nm nanoparticles.

would be expected to lead to a higher thermal conductivity than that of the bulk liquid [27]. Because heat transfer between the particles and the fluid take place at the particles and fluid interface [16], equation (10) considers the interface between nanoparticles and liquid (ordered nanolayer at solid/liquid interface) as a parameter for calculating nanofluid thermal conductivity under the static condition. By taking into account the increase in thermal conductivity of nanofluid, other factors such as dispersion and chaotic movement of nanoparticles, Brownian motion and particle migration must be considered in the interpretation of heat transfer performance of nanofluids. Moghadassi et al. [19] studied a model for the prediction of the effective thermal conductivity of nanofluids based on dimensionless groups. They found that the modeled effective thermal conductivity increases as particle size is reduced. This phenomenon is due to the relative effects of nanoparticle motion mechanisms of dilute suspensions such as Brownian motion, thermophoresis and osmophoresis, including

size dependence, on the thermal conductivity. Also, it may be due to the effect of effective surface increasing with particle size decreasing. This is achieved using the dispersion model to analyzed heat transfer enhancement of nanofluids.

Fig. 7 shows the average Nusselt number as a function of half apex angle of isosceles triangular duct of this study. As shown in Fig. 7, by increasing the apex angle from 10 to 60, for .01 volume concentration and 10nm CuO particles diameter, Nusselt number and Reynolds number increase from 1.64 to 5.46 and 322 to 2123, respectively. Consequently for laminar flow, nanofluids through equilateral triangular cross-section ducts have a maximum Nusselt number in comparison with other types of isosceles triangles.

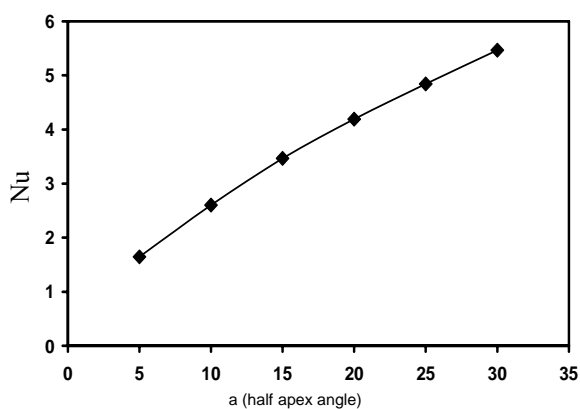


Figure 7. Heat transfer comparison between isosceles triangular ducts with various apex angles

6. Conclusions

In this paper, Laminar flow forced convection of CuO/water nanofluid in a triangular duct is studied numerically. Results indicate that adding nanoparticles to the base fluid increases the heat transfer coefficient of the fluid. Dispersion and random movement of nanoparticles inside the

fluid change the structure of the flow field and lead to heat transfer enhancement. This is achieved using the dispersion model to analyze heat transfer enhancement of nanofluids. The results obtained by numerical solution show that decreasing the nanoparticles size increases the Nusselt number at a specific concentration and increasing the nanoparticles concentration increases the Nusselt number at constant particle size. Specifically, the increase in thermal conductivity is relatively independent of particle interaction for low concentrations, while it is strongly dependent on the particle interaction for high concentrations. Results also show that equilateral triangular ducts cause higher heat transfer coefficient than other types of isosceles triangular duct.

Nomenclature

- $C_{p_{bf}}$ Specific heat of fluid [J/kg K]
- $C_{p_{nf}}$ Specific heat of nanofluid [J/kg K]
- C_{p_p} Specific heat of nanoparticles [J/kg K]
- d_p Nanoparticles diameter [m]
- k_{bf} Thermal conductivity of fluid [W/m K]
- k_{nf} Thermal conductivity of nanofluid [W/m K]
- k_p Thermal conductivity of nanoparticle [W/m K]
- k_d Dispersion thermal conductivity [W/mK]
- k_{eff} Effective thermal conductivity [W/mK]
- Re Reynolds number of nanofluid
- T Nanofluid local temperature [K]
- T_i Inlet temperature of nanofluid [K]

T_w	Triangle wall temperature [K]
u	Local axial velocity [m/s]
u_m	Average axial velocity [m/s]
U	Dimensionless velocity [m/s]
θ	Dimensionless temperature
ρ_{nf}	Density of nanofluid [kg/m^3]
ρ_{bf}	Density of fluid [kg/m^3]
ρ_p	Density of nanoparticles [kg/m^3]
ν	Volume fraction of nanoparticles

References

- [1] Rebay, M. and Padet, J., "Parametric study of unsteady forced convection with pressure gradient", *Int. J. Eng. Sci.*, 43:655–67 (2005).
- [2] Ahmet, Z. S., "Irreversibilities in various duct geometries with constant wall heat flux and laminar flow", *Energy* 23(6), 465 (1998).
- [3] Tauscher, R. and Mayinger, F., "Heat transfer enhancement in a plate heat exchanger with rib-roughened surfaces", *Lehrstuhl afur Thermodynamik Technische universitat muchen 85747 Garching Germany*, 1998.
- [4] Nassan, T. H., Zeinali Heris, S. and Noie, S. H. "A comparison of experimental heat transfer characteristics for $\text{Al}_2\text{O}_3/\text{water}$ and CuO/water nanofluids in square cross-section duct", *International Communications in Heat and Mass Transfer*, 37, 924–928 (2010).
- [5] Duangthongsuk, W., and Wongwises, S., "Effect of thermophysical properties models on the predicting of the convective heat transfer coefficient for low concentration nanofluid", *International Communications in Heat and Mass Transfer*, 1320–1326, 35 (2008).
- [6] Fotukian, S.M. and Nasr Esfahany, M., "Experimental study of turbulent convective heat transfer and pressure drop of dilute CuO/water nanofluid inside a circular tube", *International Communications in Heat and Mass Transfer*, 37, 214–219 (2010).
- [7] Namburu, P. K., Das, D. K., Tanguturi, K. M. and Vajjha, R. S., "Numerical study of turbulent flow and heat transfer characteristics of nanofluids considering variable properties", *Int. J. Thermal Sciences*, accepted 3 January (2008).
- [8] Chung, S. J., Leonard, J. P., Nettleship, I., Lee, J.K., Soong, Y., Martello, D.V. and Chyu, M.K., "Characterization of ZnO nanoparticle suspension in water: Effectiveness of ultrasonic dispersion", *Powder Technology*, 75–80, 194 (2009).
- [9] Choi, S.U.S., "Enhancing thermal conductivity of fluid with nanoparticles", *Developments and Application of non-newtonian flows*, D.A. Siginer and H.P. Wangeds., FED, V.231/MD, 66, 99 (1995).
- [10] Lee, S. and Choi, S.U.S., "Application of metallic nanoparticle suspensions in advanced cooling systems", in: 1996 International Mechanical Engineering Congress and Exposition, Atlanta, USA, (1996).
- [11] Xuan, Y. and Rotzel, W., "Conception for heat transfer correlation of nanofluid", *Int J. Heat & Mass Transfer*, 43, 3701-3707, (2000).
- [12] Bang, C. and Chang, S. H., "Boiling heat transfer performance and phenomena of Al_2O_3 -water nano-fluids

- from a plain surface in a pool", *Int. J. Heat and Mass Transfer*, 48, 2407-2419, (2005).
- [13] Soltani, S., Etemad, S. Gh. and Thibault, J., "Pool boiling heat transfer of non-Newtonian nanofluids", *International Communications in Heat and Mass Transfer*, 37, 29–33, (2010).
- [14] Kays, W. M. and London, A. L., *Compact Heat exchangers*, 3rd ed. New York, McGraw-Hill, (1984).
- [15] Shah, R. K. and London, A. L., *Laminar flow forced convection in ducts*, Academic Press Inc., New York, pp. 223-246(1978).
- [16] Zeinali Heris, S., Nasr Esfahany, M. and Etemad, S. Gh., "Numerical investigation of nanofluid laminar convective heat transfer through a circular tube", *A. Int. J. Computation and Methodology, Numerical Heat Transfer, Part A: Applications*, 52:11, 1043 – 1058, (2007).
- [17] Taylor, G. I., "Dispersion of Soluble Matter in Solvent Flowing through a Tube", *Proc. R. Soc. Lond.*, A21, 186 (1954).
- [18] Kakaç, S. and Pramuanjaroenkij, A., "Review of convective heat transfer enhancement with nanofluids", *International Journal of Heat and Mass Transfer*, 52, 3187–3196, (2009).
- [19] Akbarinia, A. and Behzadmehr, A., "Numerical study of laminar mixed convection of a nanofluid in horizontal curved tubes", *Applied Thermal Engineering*, 27, 1327-1337 (2007).
- [20] Moghadassi, A. R., Masoud Hosseini, S., Henneke, D. E. and Elkamel, A., "A Model of Nanofluids Effective Thermal Conductivity Based on Dimensionless Groups", *Journal of Thermal Analysis and Calorimetry*, Vol. 96 1, 81–84 (2009).
- [21] Yu, W. and Choi, S.U.S. , "The role of interfacial layers in the enhanced thermal conductivity of nanofluids: a renovated Maxwell model", *J. of Nanoparticle Res.*, 6, 355–361, (2004).
- [22] Naris, S. and Valougeorgis, D., "Rarefied gas flow in atriangular duct based on a boundry fitted lattice", *European Journal of Mechanical B/Fluids*, 27, 810-822 (2008).
- [23] Szalmas, L. and Valougeorgis, D., "A fast iterative model for discrete velocity calculations on triangular grids", *Journal of Computational Physics*, 229, 4315–4326 (2010).
- [24] Moghadassi, A. R., Masoud Hosseini, S., and Henneke, D. E., "Effect of CuO Nanoparticles in Enhancing the Thermal Conductivities of Monoethylene Glycol and Paraffin Fluids", *Ind. Eng. Chem. Res.*, 49, 1900–1904 (2010).
- [25] Masoud Hosseini, S., Moghadassi, A. R., Henneke, D. and Elkamel, A., "The thermal conductivities enhancement of mono ethylene glycol and paraffin fluids by adding b-SiC nanoparticles", *J. Therm. Anal. Calorim.*, 101, 113–118 (2010).
- [26] Fotukian, S. M. and Nasr Esfahany, M., "Experimental investigation of turbulent convective heat transfer of dilute c-Al₂O₃/water nanofluid inside a circular tube", *International Journal of Heat and Fluid Flow*, 31, 606–612 (2010).
- [27] Yu, C. J., Richter, A. G., Datta, A., Durbin, M. K. and Dutta, P., "Molecular layering in a liquid on a solid substrate: An X-ray reflectivity study". *Physica B.*, 283, 27–31(2000).